


LANE SEPARATOR :: LS-E-YM/LS-E-YF

When dealing with rerouting traffic, it is important to make sure your equipment can stand up to weather, vehicles and construction areas. TCT's lane separators are designed for a multitude of uses, including keeping vehicles in lanes, separating vehicles from pedestrians, isolating work zones and directing traffic direction. The lane separators are made of durable, molded rubber with reflective strips on both sides. Ideal for outdoor use, the lane separators can withstand extreme weather without cracking or breaking down. Additionally, the lane separators are easily mounted using lag bolts, rebar spikes or galvanized spikes.

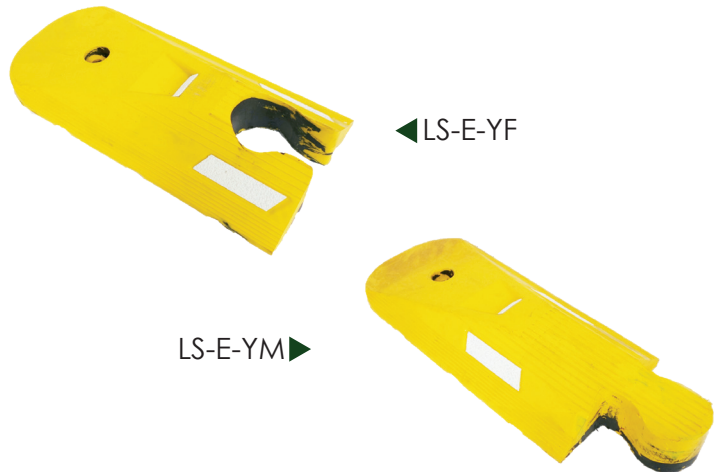

FEATURES

- Made of durable, molded rubber
- Features reflective strips to alert drivers in poor conditions
- Ideal for outdoor use
- Will not crack or erode in extreme weather conditions
- One mounting hole per end piece
- Ends are sold in sets of two: one male end and one female end

SPECIFICATIONS

- Molded rubber end piece with two reflective strips. Sold in sets of two - one male and one female
- Weight: 17lbs./7.7kg
- Height: 5"/12.7cm
- Length: 21"/53.3cm
- Width: 10"/25.4cm

ADDITIONAL PRODUCTS

- Middle sections: LS-M-Y
- Rebound post: LS-RP



We invite you to learn more about our products.

874 Old Albany Shaker Road
Latham, NY 12110
USA

<http://www.tire-conversion.com>
sales@tire-conversion.com
518.372.1300

